

Technical Data

Fluke 729 Pro

Automatic Pressure Calibrator

Portable pressure calibrator with replaceable module



Key features

Fluke 729 Pro

- **Automatic pressure generation and regulation to 7MPa/1,000psi**
- **Replaceable pressure control modules**
- **Weight <5kg**
- **Built-in test template, one-key calibration**
- **HART communication**
- **Pressure leakage testing**
- **Automatic fine-pressure adjustment, automatic pressure stabilization**
- **Quick replaceable Li-ion battery**
- **Quick relief valve with muffler**
- **Extend measurement range with 750P Series pressure modules**
- **Measure temperature with 720RTD probe**
- **Bright, color screen with dual or three split displays**
- **Rugged and portable design with standard 3-year warranty**

The Fluke 729 Pro Automatic Pressure Calibrator is designed specifically for process technicians to simplify the pressure calibration process and provide faster, more accurate test results.

With an automatic internal electric pump, a target pressure can be set in 729 Pro. The calibrator will automatically pump to the desired set-point. Then, internal fine adjustment control automatically stabilizes the pressure at the required value.

The Fluke 729 Pro can also automatically test multiple pressure test points and automatically document the results. Calibration is as easy as typing in the starting and ending pressure and the number of test points and tolerance level. The 729 does the rest.

Built-in HART communication capabilities enable HART transmitter mA adjustments, light HART configuration and the ability to adjust to applied 0 % and 100 % pressure values.

Fluke 729 Pro achieves 7MPa automatic pressure calibration with excellent portability of less than 5kg. Engineers are no longer restricted by the environment and can perform efficient calibration at will. The 729 Pro can be widely used in electric power, petroleum, chemical, pharmaceutical, metrology, metallurgy, biology, food, transportation and automobile manufacturing.

Automatic pressure generation and regulation to 7MPa (70 bar, 1,000psi). Enter a pressure up to 7 MPa and the 729 Pro will automatically pump to the desired pressure. The 729 Pro can also output changing pressure in step values or a linear ramp.

Easy calibration documentation using well-defined templates for transmitters and switches. Type in the starting and ending test pressures and number of test points, the 729 Pro does the rest by documenting the applied pressure, measured mA and % error for each test point. The bright color graphical display will flag test results that are out of tolerance in red.

Plug-in replaceable pressure control modules. Freely switch the pressure output range to achieve range matching without buying a complete new calibrator.

No tools required replaceable Li-ion battery. The lithium battery equipped can be charged separately or with the device, along with a capacity indicator to confirm the power before installation. It is easy to replace the battery without any tools.

HART communication enables mA output trim, which can be trimmed to applied values, and pressure zero trimming of HART pressure transmitters. It makes configuration tasks much easier, such as changing a transmitter tag, measurement units and ranges. Other supported HART commands include setting fixed mA outputs for troubleshooting, reading device configuration parameters and reading device diagnostics.

Key parameters

	729Pro 7M	729Pro 4M
Key parameters		
Pressure control range	(-14 to 1000) psi (-95 to 7000) kPa (-0.95 to 70) bar	(-14 to 600) psi (-95 to 4000) kPa (-0.95 to 40) bar
Pressure type	Gauge/absolute (Depends on the type of pressure module)	
Control stability	0.005% of FS, minimum	
Built-in replaceable pressure control modules	Yes, 6 modules	Yes, 4 modules
External pressure measurement modules	750 Series pressure modules, 50 modules ranging from 0 to 1 in H ₂ O, 2.5 mbar, 250 Pa to 10,000 psi, 70 bar, 7 MPa	
mA sourcing/measurement	Yes	
Voltage measurement	Yes	
Loop power	24 V dc	
One-key calibration	Task templates make documented automatic calibrations easy.	
Pressure switch testing	Yes	
Pressure leakage testing	Yes	
HART	Yes	
Autostep / auto ramp	Yes (with customizable speed, mode and style)	
Log function	Yes	
Software	DPCTrack2 Calibration and Asset Management Software	
One-key pressure-relief	Yes (muffler)	
Battery	Rechargeable lithium battery with capacity indication (charged with the instrument or separately)	
Language	English	

Pressure module selection table

Pressure module	Pressure type	Range	Resolution ^[3]	Overall uncertainty	729Pro 4M	729Pro 7M
FLK-PMM-200K ^[1]	Gauge	(-15 to 30) psi (-100 to 200) kPa (-1 to 2) bar	0.0001 psi 0.001 kPa 0.00001 bar	0.02 % FS / year, maximum	•	•
FLK-PMM-200KA ^[2]	Absolute	(0 to 30) psi (0 to 200) kPa (0 to 2) bar	0.0001 psi 0.001 kPa 0.00001 bar	0.05 % FS / year, maximum	•	•
FLK-PMM-2000K ^[1]	Gauge	(-14 to 300) psi (-95 to 2000) kPa (-0.95 to 20) bar	0.001 psi 0.01 kPa 0.0001 bar	0.02 % FS / year, maximum	•	•
FLK-PMM-4000K ^[1]	Gauge	(-14 to 600) psi (-95 to 4000) kPa (-0.95 to 40) bar	0.01 psi 0.01 kPa 0.0001 bar	0.02 % FS / year, maximum	•	•
FLK-PMM-7000K ^[1]	Gauge	(-14 to 1000) psi (-95 to 7000) kPa (-0.95 to 70) bar	0.01 psi 0.01 kPa 0.0001 bar	0.02 % FS / year, maximum		•
FLK-PMM-7000KA ^[2]	Absolute	(0 to 1000) psi (0 to 7000) kPa (0 to 70) bar	0.01 psi 0.01 kPa 0.0001 bar	0.02 % FS / year, maximum		•

[1] Measurement reference


[2] Absolute reference

[3] Dry air or non-corrosive gases only / 15 °C to 35 °C

Specifications

	729Pro 7M	729Pro 4M
Pressure specifications (See User Manual for detail specifications)		
1-year specifications	0.02% of FS	
Control specifications	0.005% of FS, minimum	
Electrical specifications (*All specifications are valid to 110 % of range, except 24 mA sourcing and simulating which are valid to 100 % of range)		
mA measure, source and simulate	0 mA to 24 mA (resolution of 1 μ A)	
Volts dc measurement	0 V dc to 30 V dc (resolution of 1 mV)	
Accuracy	0.01% FS \pm 2 LSD (23 $^{\circ}$ C \pm 5 $^{\circ}$ C)	
Stability	20 ppm FS/ $^{\circ}$ C (-10 $^{\circ}$ C to +18 $^{\circ}$ C and 28 $^{\circ}$ C to 50 $^{\circ}$ C)	
Loop compliance voltage	24 V dc @ 20 mA	
mA simulation working voltage	12 V dc to 30 V dc	
Temperature measurement, 100 Ω Pt (385) RTD	-50 $^{\circ}$ C to +150 $^{\circ}$ C	
Temperature resolution	0.01 $^{\circ}$ C	
Temperature accuracy	\pm 0.1 $^{\circ}$ C \pm 0.25 $^{\circ}$ C combined uncertainty when using 720 RTD probe (optional accessory)	
Drive capability (mA Source)	1200 Ω (without HART resistor), 950 Ω (with internal HART resistor)	
Mechanical specifications		
Dimensions (H x W x L)	290 mm x 215 mm x 100 mm	
Weight	4.9kg	
Environmental specifications		
Operating temperature	-10 $^{\circ}$ C to 50 $^{\circ}$ C	
Pressure control	0 $^{\circ}$ C to 50 $^{\circ}$ C	
Battery Charging	0 $^{\circ}$ C to 40 $^{\circ}$ C	
Storage temperature	-20 $^{\circ}$ C to 60 $^{\circ}$ C	
Operating altitude	<3000 m	
Storage altitude	<13000 m	
Operating humidity	Non-condensing (<10 $^{\circ}$ C) \leq 90 % RH (10 $^{\circ}$ C to 30 $^{\circ}$ C) \leq 75 % RH (30 $^{\circ}$ C to 40 $^{\circ}$ C) \leq 45 % RH (40 $^{\circ}$ C to 50 $^{\circ}$ C)	
Safety		
General	IEC 61010-1, pollution degree 2	
Lithium battery	IEC 62133, UN 38.3; 14.4 V, 6.7Ah, 97Wh, 4ICR19/66-2 (4s2p) Charge input 19.5 V, 1.6 A	



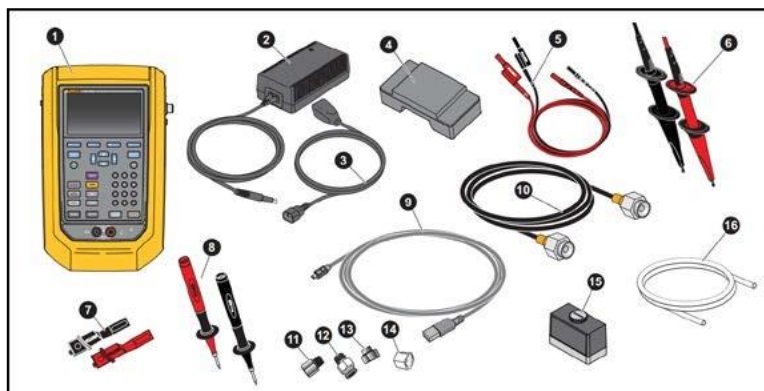

Product Kit

Item	Description
1	729 Pro Automatic Pressure Calibrator
2	AC/DC converter
3	Power cord
4	Rechargeable Li-ion battery
5	Stackable test lead set
6	AC280 Sure Grip hook set (red and black)
7	Alligator clips (red and black)
8	One set of TP220 test probes (red and black)
9	USB communication cable: Type-A for PC to Mini-B for the device, 1 m (3 ft)
10	Flexible hose, 2 mm diameter , 1.5 m (5 ft) length
11	Fitting, 1/8 in NPT-Female x 1/4 in NPT-Female
12	Fitting, 1/8 in NPT-Male x 1/4 in NPT-Male
13	Fitting, 1/8 in NPT-Female x M20 Female
14	Fitting, 1/4 in BSP-Female x 1/8 in NPT-Female
15	Pressure Measurement Module (PMM)
16	Hose for draining condensed water generated inside the Product. 1/8 in diameter, 1 ft length
Not shown	Adjustable quick-release strap for hanging the product, Safety Information, Traceable calibration report with data, PTFE tape

Ordering Information

Model	Description	Fluke P/N
FLK-729Pro 4M	Fluke 729 Pro Automatic Pressure calibrator, 4Mpa	5300476
FLK-729Pro 7M	Fluke 729 Pro Automatic Pressure Calibrator, 7Mpa	5300483
FLK-PMM-200K	Replaceable pressure module, (-15 to 30) psi, (-100 to 200) kPa, (-1 to 2) bar	5299928
FLK-PMM-2000K	Replaceable pressure module, (-14 to 300) psi, (-95 to 2000) kPa, (-0.95 to 20) bar	5299955
FLK-PMM-7000KA	Replaceable pressure module, absolute, (0 to 1000) psi, (0-7000) kPa, (0 to 70) bar	5299962
FLK-PMM-200KA	Replaceable pressure module, absolute, (0 to 30) psi, (0 to 200) kPa, (0 to 2) bar	5299970
FLK-PMM-7000K	Replaceable pressure module, (-14 to 1000) psi, (-95 to 7000) kPa, (-0.95 to 70) bar	5299996
FLK-PMM-4000K	Replaceable pressure module, (-14 to 600) psi, (-95 to 4000) kPa, (-0.95 to 40) bar	5300006

Optional Accessories

Description	Quantity	Fluke P/N
BP729, Rechargeable Li-ion battery	1	4817068
AC power supply/ battery charger	1	4878453
International AC Adapter (except China)	1	2441372
Power cord, patch cord (except China)	1	4542113
Power cord (China only)	1	2716592
USB cable assembly	1	4499448
TP220, test probe, red	1	3971276
Alligator clip set	1	3765923
Lead assembly, stackable test lead set	1	3669716

Fluke. Keeping your world up and running.®

Fluke reserves the right to interpret the above contents. Specifications subject to change without notice.

©2021 Fluke Corporation. 03/2021